



Datasheet Cawiton SN930

Application:

Cawiton SN930 is a standard (universal) SEBS with a hardness of 30 Shore A. The mechanical properties of this material are relatively good.

Typical Properties at 23°C	Standard	Unit	Value
General Properties			
Polymer abbreviation			SEBS
Hardness	ISO 868	Shore A	30
Density	ISO 2781	kg/dm ³	1,17
Colour			opaque
Melting point	DSC *1)	°C	166

Rheological Properties			
Melt Flow Index	ISO 1133	g/10min	2,0
Temperature	ISO 1133	°C	230
Weight	ISO 1133	kg	2,16


Mechanical Properties				*2)	*3)
			↓	↔	
Tensile strength	ISO 37	MPa	2,6	4,5	
Elongation at break	ISO 37	%	677	841	
Tensile modulus at 100 % elongation	ISO 37	MPa	1,0	0,8	
Tensile modulus at 200 % elongation	ISO 37	MPa	1,2	1,0	
Tensile modulus at 300 % elongation	ISO 37	MPa	1,5	1,4	
Tear strength	ISO 34-2	kN/m	15,4	18,3	
Compression set 22h/70°C	ISO 815	%		37	
Compression set 24h/120°C	ISO 815	%			

Processing Properties			
Melt temperature [min. – max.]		°C	180 - 240

*1 Measured with a differential scanning calorimeter

*2) Measured in flow direction

*3) Measured perpendicular to the flow direction

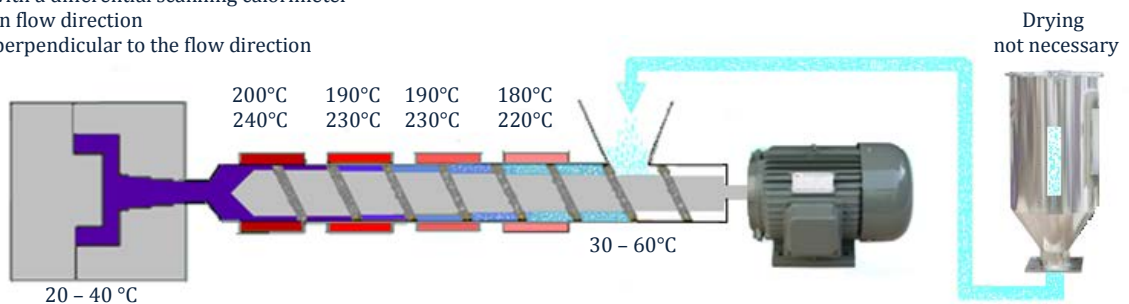

Please contact our material specialists if you need addition information about this material.